

F3 PLUS TAXIMETER

index

Main Page 0

Main Features 2

Interfacing System 3



Main Features

Dimensions

Width: 18,5 cm.
Height: 6,2 cm.
Depth: 2,5 cm.

Weight

Gr. 350 ca.

Displays

Fare counter:
6 Digits Red High-Luminosity Led
Extra counter:
5 Digits Red High-Luminosity Led
Illuminated Front Text
1 Digit tariff index

Power Supply

From 8,5 to 16 Volts

Temperature

From -15 to 70 °C.

Relative Humidity

95%

Mechanical Strenght

3 g

Distance Unit

From 10 cm. to 6553 meters
Step 10 cm.

Waiting Time Unit

From 0,1 sec. to 6553
Step 0,1 sec.

Totalizator Mode

Dataflash 1Mb
- 45 + 45 Statistic Memory
- 12 x 45 Monthly Statistic
- 50 x 45 Statistics for each Driver

Tariff Structure

63 Smart and fully independent Tariffs
+8 Night Tariffs
+8 Holiday Tariffs
+4 Autofare Tariffs
+4 Autidistance Tariffs

Tariff Choice

Manual
Radio

Automatic at pre-programmed:

- Distance(s)
- Time(s)
- Date(s)
- Fare(s)
- Amount(s)

Tariff Program Change

Manual by Key
Via Radio
By Programmer
By Chip Card
By Infrared Programmer

Peripheral Connections

Printer
Magnetic Card Reader
Chip Card Reader/Writer
Infrared Passenger Sensor
Mobile Data Terminal
Modem
Cellular Phone

Communications Ports

Internal COM1 and COM2
RS232 +/- 12 Volts STD
4 Input/Output TTL level

Communications Protocols

GMSI
Mobilstar
RomaNet
Telecom It. (Upgradable)

Operative Firmware

Upgradable firmware on Flash

Transducer

Mechanical Hall Effect or Internal adapter for electronic speedometer up to 100.000 l/km

Power Outputs


1 Roof Light 25 Watts
4 Programmable power outputs 5 Watts



Interfacing System



The **Digitax F3** Taximeter has several communication channels that make possible the communication with the external world. Two independent RS232 serial ports at baud rate from 300 to 38400 and a 4 wire synchro channel plus a special printer driver, allow the interfacing to several devices at the same time. The Commtax 2 included protocol allows remote managing of all the taximeter, magnetic Credit Card reader, chip card and printer functions. The link to a dispatch system or another mobile terminal is accomplished on the RS232 port at any baud rate from 300 to 38400 using a frame structure N, 8, 1: signal level +/- 12 V, using the protocol COMMTAX 2 described in this document.

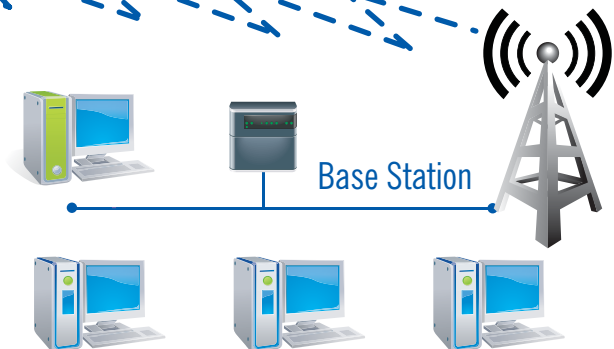



Digitax Italy Headquarter
Via dell'Industria 16 - 62017 Porto Recanati (MC) - ITALY
Phone +39 071 7590984 r.a. - Fax +39 071 9797405
E-mail info@digitax.com - Web www.digitax.com
GPS: 43.412423,13.654716


Microsoft Partner
Silver OEM Hardware

Digitax España

C/Tomás Bretón, 7
28045 – Madrid
SPAIN
Phone +34 902366292
Fax +34 915271562
Web: www.digitax-es.com
E-mail: info@digitax-es.com

Digitax Electronics U.K.

Smokehouse, 31
Tanners Bank North Shields
Tyne & Wear NE 30 1 JH
ENGLAND
Phone +44 (0191) 296 1294
Fax +44 (0191) 257 8438
Web: www.digitax.net
E-mail: digitaxuk@aol.com

Digitax Deutschland

Taxitech Handelsges. mbh
Sommerkamp 31a - 22335
Hamburg
GERMANY
Phone +49 40 555 05540
Fax +49 40 555 05530
Web: www.digitax-de.com
E-mail: digitax@taxitech.de

Digitax Nederland B.V.

Postbus 84112
3009 CC ROTTERDAM
HOLLAND
Phone +31 10 4512121
Fax : +31 10 4500453
E-mail: h.wittenberg@planet.nl
E-mail: info@digitax.nu

Digitax CO. Mauritius

P.O. box 775
Bel Village
MAURITIUS
Phone +230 234 4533/4936
Fax +230 234 5866
Web: www.mtl-co.net
E-mail: mtlts@intnet.mu